


MOLYDUVAL

Prometheus MA 00

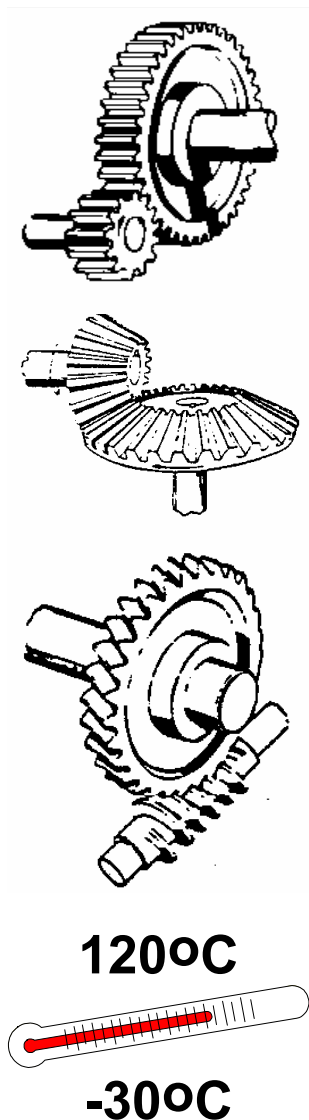

High Performance Gear Grease

MOLYDUVAL Prometheus MA 00 is a lubricating grease for heavily loaded gears and chains containing a high percentage purest molybdenum disulphide (MoS_2). It is very tacky and water resistant.

Characteristics

- tacky
- water resistant
- good corrosion protection

Applications

- for lubrication of all kind of high loaded gears also open gears or gears which are not absolutely seal.
- for lubrication of all kind of high loaded chains.

How To Use

Apply gears or chains with brush or automatic lubrication system.

| TECHNICAL DATAS | Specification | Unit | |
|-----------------------------|---------------|-------------------|------------------------------------|
| Name | DIN 51502 | | GLPF00G-30 & GPF00G-30 & KPF00G-30 |
| Base Fluid | | | Mineral Oil |
| Color | | | Black |
| Density, 15°C | SEB 181301 | kg/m ³ | 920 |
| Worked Penetration | DIN ISO 2137 | 0,1-mm | 415 |
| Classification NLGI | DIN 51818 | - | 00 |
| Dropping Point | DIN ISO 2176 | °C | 180 |
| Operating Temperature Range | | °C | -30 bis +120 |
| Water Resistance | DIN 51807 T1 | Grade | 1-90 |
| VKA-Welding Load | DIN 51350 T4 | N | 2800 |
| Timken Test | ASTM D-2509 | lbs | 50 |

For more information call +49 2102 9757-28 or contact us at <http://www.molyduval.com> αβχδε

The technical information in this technical data sheet represents our present knowledge.

Because of complexity of tribological systems it does not form part of any sales contract as guaranteed properties of the delivered material.