



MOLYDUVAL Sekorex D 15

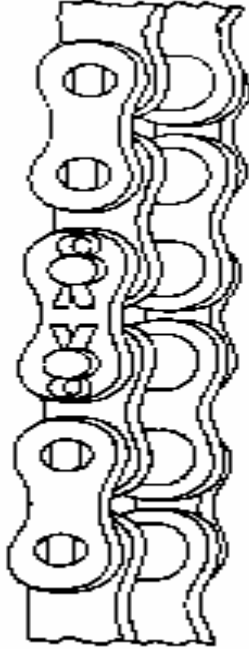

200°C



-60°C

Low Viscosity Synthetic Chain Oil

MOLYDUVAL Sekorex D 15 is a pure synthetic high treated low viscosity lubrication oil for chains. Besides of its excellent low and high temperature stability it guarantees excellent wear protection and good corrosion protection.

MOLYDUVAL Sekorex D 15 is qualified even for smaller chains. It penetrates and lubricates close clearings, pins and bushings and offers then a long lasting film for less wear and good corrosion protection.

Characteristics

- extreme temperature stability
- excellent wear protection, high load carrying properties
- only low evaporation loss at high temperatures
- appropriate ageing- and oxidation stability
- excellent creeping characteristics
- self-acting chain cleaning
- exceptional lubrication- and separation effect
- reduces friction coefficient to a minimum
- protects against rust and friction corrosion
- saves antifrictional properties
- light viscosity for outstanding low temperature actuation.
- high viscosity index, less change with temperature

Applications

- as chain lubricant for all kind of chains (f.e. at pasteurisation plants, drying ovens, lacquering ovens, textile industry, plaster plates industry). The lubricant draws in directly into the chains of the ring splits and evokes an excellent wear protection. As well as for powered and transport chains.



For more information call +49 2102 9757-28 or contact us at <http://www.molyduval.com> αβχδε

The technical information in this technical data sheet represents our present knowledge.

Because of complexity of tribological systems it does not form part of any sales contract as guaranteed properties of the delivered material.